


Flexible Borehole Electrode System for Multi-Electrode-Equipment and Bore- hole Tomography

Get rid of electrode coupling problems
through omnidirectional electrode contact

Pressure
hose | Cable

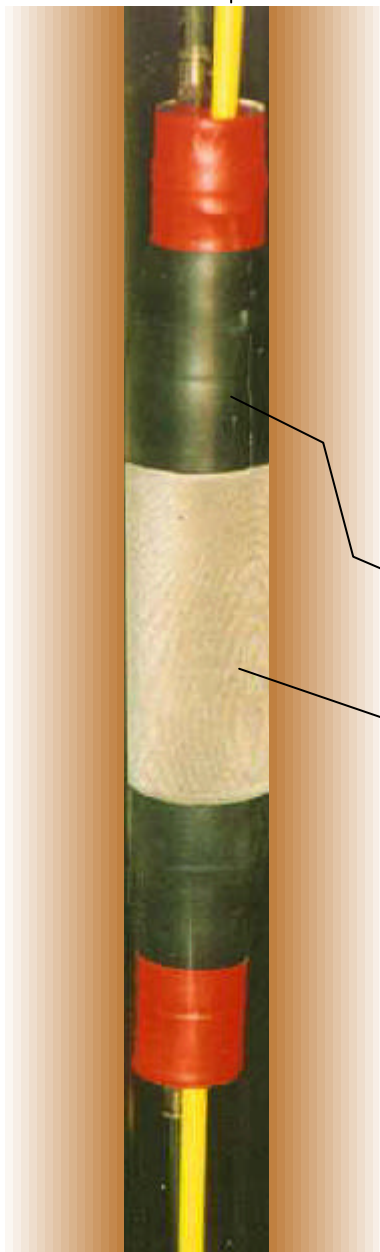

Multi-Electrode-Liner System (2"- 3")

Flexible electrodes can be pressed to the borehole wall and will generate omnidirectional contact.

Electrodes are manufactured by very low resistive flexible metal fabric.

A rubber sleeve above and below each electrode prevents direct contact to borehole fluid.

Standard system contains 12 electrodes with 1 m spacing (other on request)

Rubber sleeve
(prevents direct short circuit through borehole fluid)

Flexible metal fabric

Application in dry Boreholes

